

GT Thermostat Accessories

THERMOWELL APPLICATIONS

Type GPW Thermowell is suitable for immersion type applications where the solution being heated must be kept away from the thermostat sensing bulb or where replacement of the thermostat while system is under pressure is desired.

STANDARD FEATURES



Completely heliarc welded assembly includes standard wall tube, fitting with both internal and external NPT threads, and .188 inch thick end disk.

PACKING GLAND APPLICATIONS

Type PG Pack Gland is designed to seal off the space around the capillary of the GT Thermostat. The external threads of the fitting makes possible the sealing off of the sensor from the contents without the use of a thermowell.

STANDARD FEATURES

Standard design and size makes this fitting suitable for installation of most bulb and capillary thermostats.

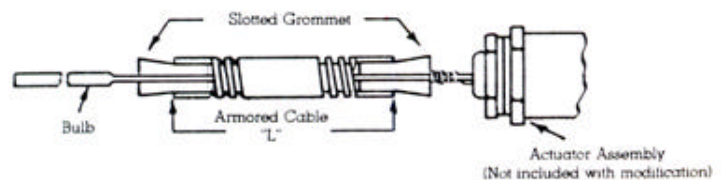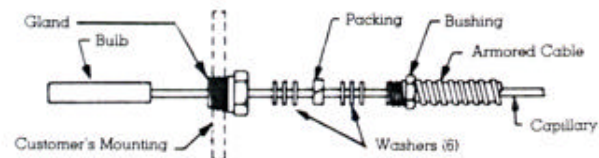

Catalog Number	Description	Material	Diam. (Inches)	Length (Inches)	Fitting Size NPT	Wt. (lbs.)
GPWS-12	Thermowell for GT Stat	Steel	1/2"	12	1/2"NPTx3/4"NPT	1
GPWS-24	Thermowell for GT Stat	Steel	1/2"	24	1/2"NPTx3/4"NPT	2
GPWS-36	Thermowell for GT Stat	Steel	1/2"	36	1/2"NPTx3/4"NPT	3
GPWSS-12	Thermowell for GT Stat	Stainless Steel	1/2"	12	1/2"NPTx3/4"NPT	1
GPWSS-24	Thermowell for GT Stat	Stainless Steel	1/2"	24	1/2"NPTx3/4"NPT	2
GPWSS-36	Thermowell for GT Stat	Stainless Steel	1/2"	36	1/2"NPTx3/4"NPT	2
GPWL-12	Thermowell for GT Stat	Lead	5/8"	12	1/2"NPTx3/4"NPT	1
PG-25A	Packing Gland for GT	Nickel Plated Brass			3/8 - 18 (NPT)	0.2
PG-25B	Packing Gland for GT	Nickel Plated Brass			1/2 - 14 (NPT)	0.2
PG-25C	Packing Gland for GT	Nickel Plated Brass			3/4 - 15 (NPT)	0.2
PG-25D	Packing Gland for GT	Stainless Steel			3/8 - 18 (NPT)	0.2
PG-25E	Packing Gland for GT	Stainless Steel			1/2 - 14 (NPT)	0.2
PG-25F	Packing Gland for GT	Stainless Steel			3/4 - 15 (NPT)	0.2