
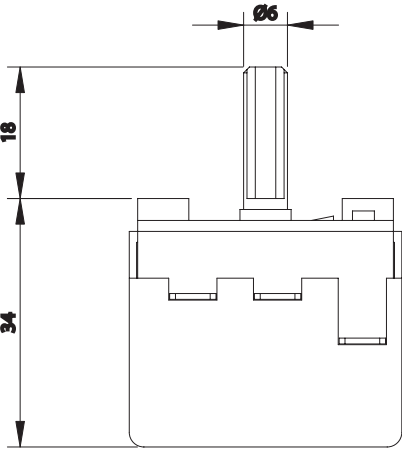
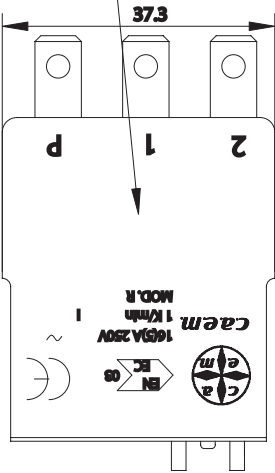



TERMOSTATO MODELLO R
THERMOSTAT TYPE R

SCALA DI TEMPERATURA
TEMPERATURA AMMESSA SUL CORPO
DATA DI FABBRICAZIONE

TEMPERATURE RANGE
TEMPERATURE ADMITTED ON THE BODY
PRODUCTION DATE

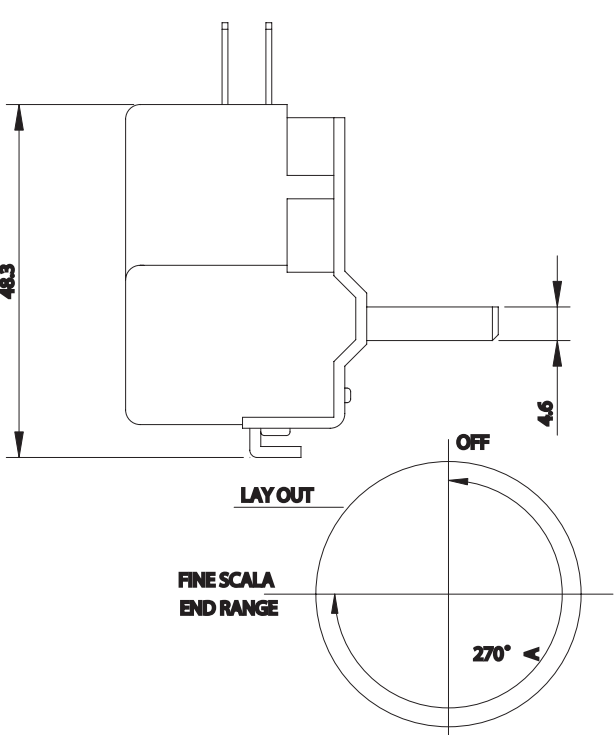

SCHEMI ELETTRICI / ELECTRICAL DIAGRAMS

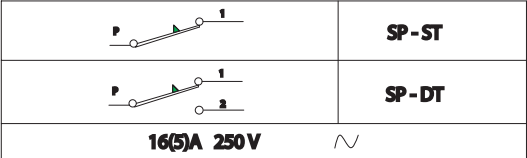

SCALE DI TEMPERATURE TEMPERATURE RANGE		DIMENSIONI BULBO BULB DIMENSIONS		MATERIALE MATERIAL
		A	B	
0°-40°C	T 80	175	ø6	RAME/COPPER
30°-90°C	T 100	100	ø6	RAME/COPPER
30°-110°C	T 100	90	ø6	RAME/COPPER
30°-120°C	T 100	80	ø6	RAME/COPPER
30°-150°C	T 150	70	ø6	RAME/COPPER
50°-200°C	T 150	60	ø6	RAME/COPPER
50°-300°C	T 150	80	ø5	RAME/COPPER
50°-300°C	T 150	180	ø3	INOX/STAINLESS STEEL

SONO DISPONIBILI A RICHIESTA CAPILLARI E BULBI INOX
VERSIONS AVAILABLE WITH COPPER AND STAINLESS STEEL CAPILLARY AND BULB

OMOLOGAZIONE

TERMINALI FASTON 6.3mm
RAGGIO MIN. DI PIEGA CAPILLARE: 5 MM
LAY OUT IN BAGNO NORMALIZZATO

APPROVAL

CONNECTION TABS 1/4"
MIN. CAPILLARY BENDING RADIUS : 5mm
LAY OUT IN LIQUID BATH

