


TERMOSTATO TU RM
THERMOSTAT TU RM

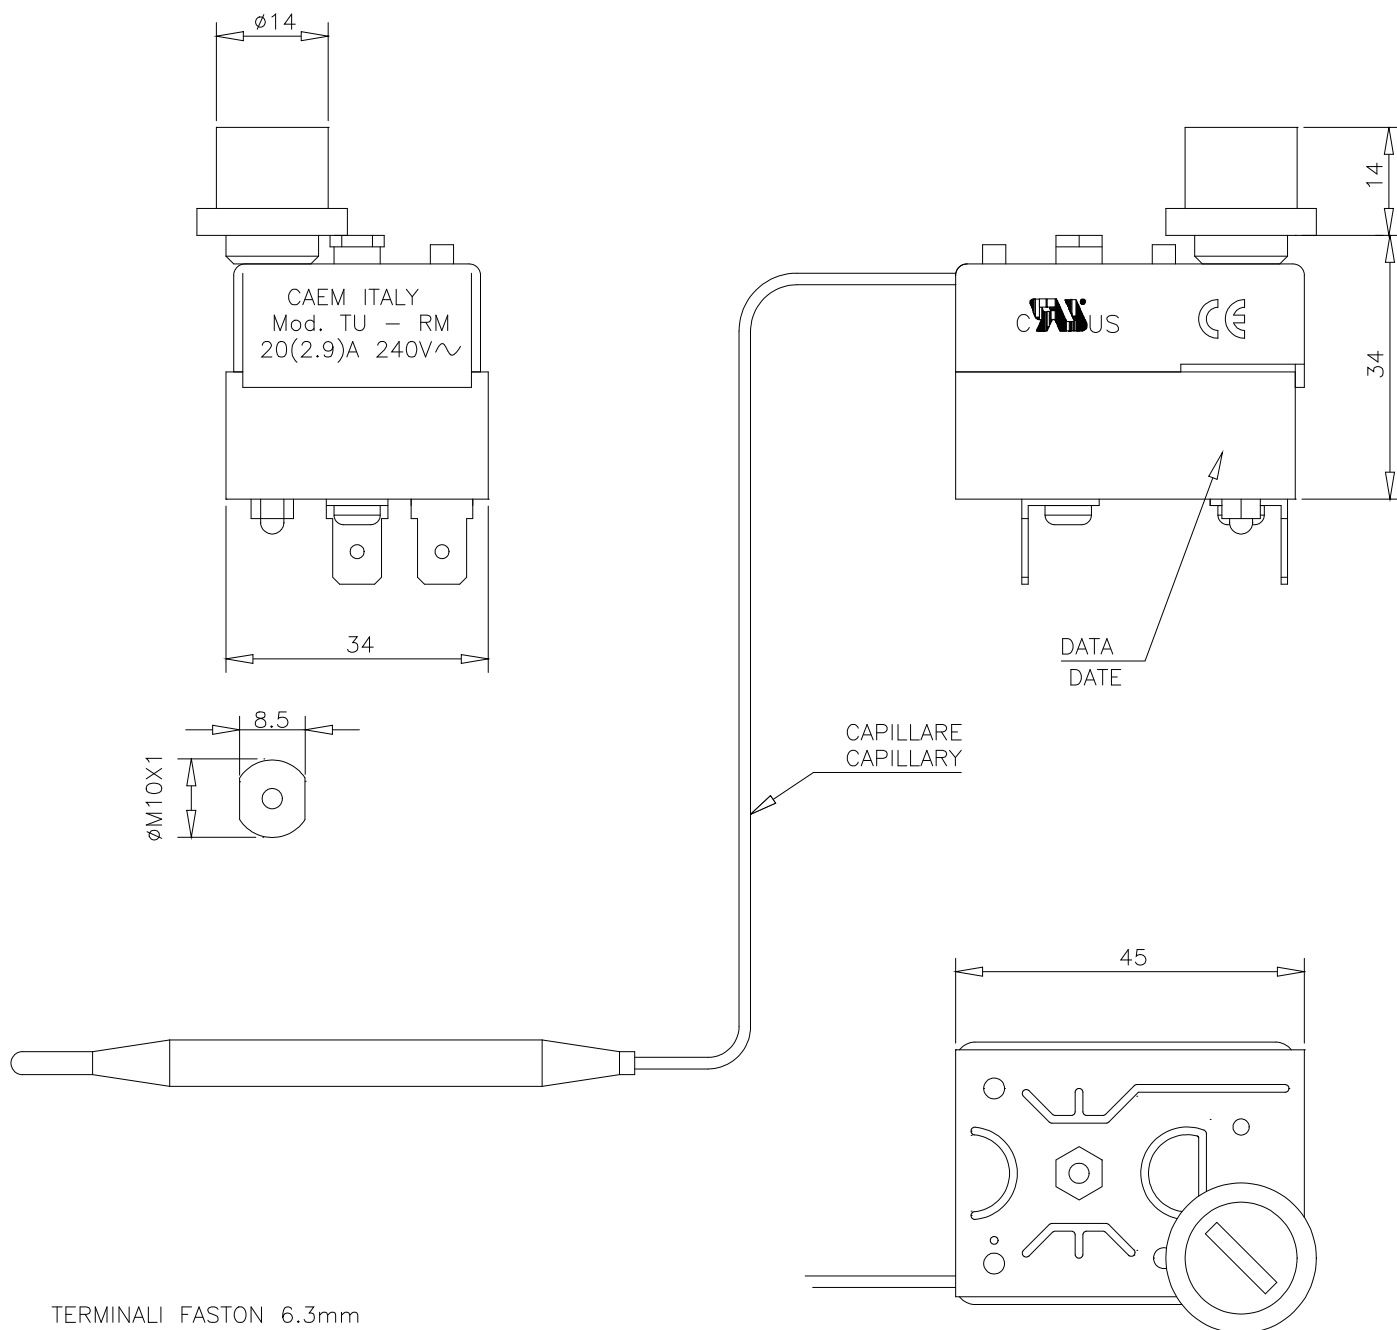

TERMINALI FASTON 6.3mm
RAGGIO DI CURVATURA CAPILLARE MINIMO : 5mm
TEMPERATURA DI INTERVENTO SU RICHIESTA DEL CLIENTE
120/240 VAC, 20 A – UL, C.S.A.
VERSIONI CON CAPILLARE E BULBO IN RAME O ACCIAIO INOX

CONNECTION TABS 1/4"
MIN CAPILLARY BENDING RADIUS 5 MM
TEMPERATURE SETTING ACCORDING TO THE CUSTOMER REQUEST
120/240 VAC, 20 A – UL, C.S.A.
VERSIONS WITH CAPILLARY AND BULB IN COPPER OR STAINLESS STEEL

SCHEMA ELETTRICO
ELECTRICAL DIAGRAM :

